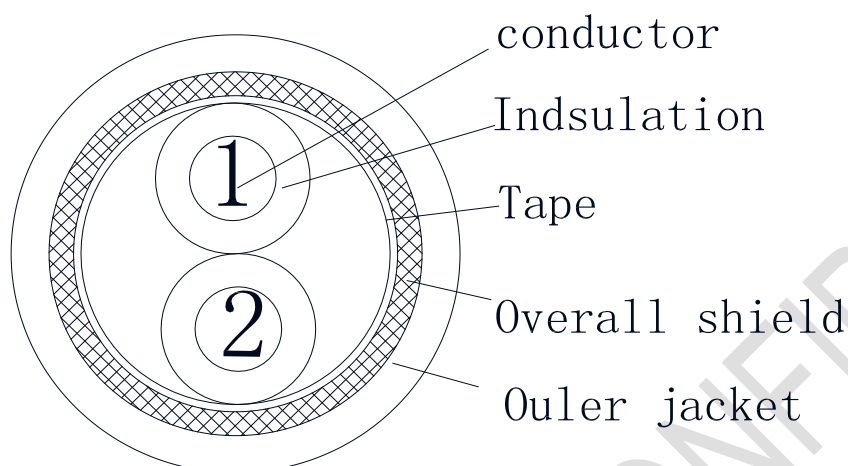


LONGTRONIC™ LF-DATA LiYCY 2x0.5mm²**Description**

80℃ 500V Industrial control cable, PVC insulation, Heat resistant PVC jacket Cable

Design**Client code 190218**

Conductor 16*0.20mm stranded bare copper wire

Insulation Heat resistant PVC

OD:1.70±0.05mm

Color: 1.White; 2.Brown;

Overall Tape PET tape

Overall screen Tinned copper braiding, Coverage≥85%

Outer Jacket Heat resistant PVC

Color : Grey(Similar RAL7035)

Nom. OD:5.6±0.4mm

Marking: **ZL5606122 YY/MM/DD ****m**

Note: YY means year; MM means month; DD means day;

Electrical Characteristics(20℃)

Conductor DC resistance: ≤76.0ohm/km

Dielectric Strength: 1500V for 1min

Insulation Resistance: ≥20MΩ.km

Other Characteristics

Operating temperature: -40℃ to 80℃
Installation temperature: -5℃ to 70℃
Min bending radius: Fixed installation: 6xOD
Occasional movement: 15xOD
Flame resistance: IEC 60332-1
This cable meets RoHS requirements

Packing information

Packing length: 100m; 200m; 500m
Packaging: reel;

ZHAOLONG CONFIDENTIAL

Prepared by: JianghuanYan	Checked by: huafeng li	Approved by: huafeng li
---------------------------	------------------------	-------------------------